

# CYGNUS FMD SYSTEM

ULTRASONIC FLOODED  
MEMBER DETECTOR



With over three decades of designing ultrasonic equipment for the offshore and underwater environment, Cygnus fully understands the requirements of the subsea inspection industry. This entirely new Flooded Member Detector (FMD) combines intelligent, advanced software and electronics with a truly simple to use interface.

IDEAL FOR  
USE IN



UNDERWATER  
PIPELINES



CIVIL  
ENGINEERING



MARINE  
STRUCTURES



OFFSHORE  
PLATFORMS



## CYGNUS FMD SYSTEM KEY FEATURES

The FMD system comprises three fundamental parts;

REPORTING SOFTWARE

SUBSEA UNIT



PROBE AND PROBE HANDLER

### VERSATILE

The FMD system is both diver or ROV deployable. Being of a compact design the probe is able to get into to hard to reach areas (e.g. K nodes) where other inspection methods cannot. A range of versatile options to suit working depths and varying requirements are available:



**SUBSEA UNIT**  
LIGHTWEIGHT ACETAL OR TOUGH STAINLESS STEEL



**CABLE PROTECTOR**  
PROVIDES EXTRA CABLE PROTECTION AND AN ATTACHMENT POINT FOR DIVERS



**SELF ALIGNING PROBE HANDLER**  
LIGHTWEIGHT ACETAL OR TOUGH STAINLESS STEEL



**SYSTEM TEST TANK**  
USED TO RUN A FULL SYSTEM TEST OF THE FMD SYSTEM



**UMBILICAL CABLE** 120M LENGTH OR 350M LENGTH



**COMMUNICATIONS PSU**  
PROVIDES POWER AND COMMUNICATIONS TO THE DIVER



**STAINLESS STEEL HANDLE OPTIONS**  
D-HANDLE FOR DIVERS  
FISHTAIL OR T-BAR FOR ROVS

### COST EFFECTIVE

The Cygnus FMD System is owner operated and extremely easy to learn and understand. Due to its simplicity of use, the FMD system can be used by a range of operators, with varying experience, without the need for external contractors.

### EASY TO USE

The Cygnus FMD has an innovative probe handling solution which self aligns, ensuring correct contact with the member, even when approached from an angle.

The system also has a contact sensor which will not allow a test to be taken unless the probe is correctly aligned.

The system returns a simple DRY / FLOODED result to the reporting software with results logged at the surface.

### RUGGED

Available in high grade acetal or stainless steel for the harshest environments. The FMD equipment is designed to the highest standards, supported by a three year warranty.


### RELIABLE

Cygnus is an ultrasonic specialist. Years of industry experience and design expertise combine to make this system an extremely advanced, effective and reliable Ultrasonic FMD System available.

- The purpose-designed system boasts:
  - advanced signal processing
  - an advanced peak detection algorithm
  - low distortion / low noise data acquisition to ensure highest level of confidence and to eliminate false readings.
- The system will only take a measurement when the contact sensor detects probe contact, ensuring reliable results every time. The reporting software will indicate at the surface should the probe lose contact during a test.
- System Test Function ensures the reliability of the system before it is deployed.

### FMD REPORTING SOFTWARE

- Used to perform system tests
- Displays test results
- Displays A-Scans for verification
- Indicator shows RED if flooded, GREEN if dry
- Logs results for offline analysis
- Reports can be generated and exported to PDF and Excel

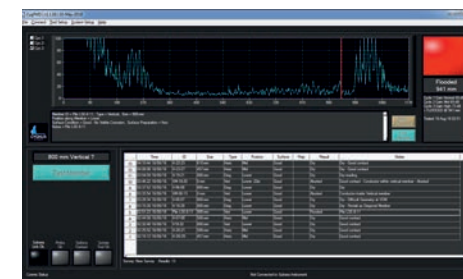

GO TO PRODUCT PAGE

Visit [www.cygnus-instruments.com](http://www.cygnus-instruments.com) to explore our full product range

Call our team today on +44 (0) 1305 265 533 for expert product advice

## CYGNUS FMD SYSTEM

USB Mini B Connector under end cover (other end to connectors). Can be used to update the instrument firmware.

Feature	Description
<b>Power Supply Requirements (Generic)</b>	
Power Supply Input to Electronics Bottle	12-24V supply input @ 60mA (average current) @ 200mA (maximum current)
<b>Power Supply Requirements for Power Supply and Comms Unit (Diver)</b>	
Mains supply	110AC or 230VAC
<b>Connections</b>	
Probe connector	CRE PL-A-09-M. Mates with Bulkhead CRE BR-A-09-F Type 19
Power/Comms connector	MCBH4F
External Power/Comms connector	MCBH6M
<b>General Attributes</b>	
Operating Temperature Range	-10°C to +50°C (14°F to 122°F)
Storage Temperature Range	-10°C to +35°C (14°F to 95°F)
Measurement Ranges	200mm(0.2m) to 2500mm(2.5m), 0.66ft to 6.56ft
Measurement Resolution	1mm
<b>Transmitter</b>	
Pulser Voltage	100V to 400V (adjustable)
Pulse Width	850ns (adjustable)
Damping	470 Ohm
<b>Receiver</b>	
Useable Gain range	0dB to 70dB (adjustable)
<b>Probe</b>	
Centre Frequency	0.5MHz
Technology	Piezo-composite
<b>Pressure Rating</b>	
Electronics Bottle	Tested to 400m
Probe Assembly	Tested to 400m
<b>Other</b>	
Compliance	CE, UKCA, RoHS. Declarations of Conformity supplied with kit.
<b>Dry Weights</b>	
Electronics bottle (stainless steel)	4.87kg
Electronics bottle (acetal)	0.9kg
Probe Holder (stainless steel)	4.5kg max.
Probe Holder (acetal)	1.95kg max.

ISS5 02/22

All information provided is subject to change without prior notice.



Cygnus Instruments Ltd.  
Cygnus House  
30 Prince of Wales Road  
Dorchester  
Dorset DT1 1PW  
United Kingdom



### Cygnus Headquarters

Call +44 (0) 1305 265 533  
Email [sales@cygnus-instruments.com](mailto:sales@cygnus-instruments.com)  
Visit [cygnus-instruments.com](http://cygnus-instruments.com)

### Cygnus UAE

Call +971 50 3459305  
Email [ribu@cygnus-instruments.com](mailto:ribu@cygnus-instruments.com)  
Visit [cygnus-instruments.com](http://cygnus-instruments.com)

### Cygnus USA

Call +13462230415  
Email [sales@cygnus-instruments.com](mailto:sales@cygnus-instruments.com)  
Visit [us.cygnus-instruments.com](http://us.cygnus-instruments.com)

### Cygnus Singapore

Call +65 6252 5909  
Email [sales@cygnus-instruments.sg](mailto:sales@cygnus-instruments.sg)  
Visit [cygnus-instruments.com/sg/](http://cygnus-instruments.com/sg/)